

5. INSERT LED TUBES

- a. Read label on the LED tube to ensure the power end of LED is aligned with powered tube socket, then insert LED lamp in the normal way by sliding pins into sockets and rotating a quarter turn until LED tube locks in place.
- b. LED lamps are now fully installed.
- c. Replace troffer lens, if present.
- d. After modification completed. Attach the Replacement Marking and cautionary Label to a visible place on the luminaire and keep it visible after installation. Be sure to mark the type of wiring on the luminaire label (single or double-ended).

6. RESTORE THE POWER OF LUMINAIRE

Restore power to circuit/luminaire and test light. If necessary, adjust position of LED tube, and enjoy your new LED tube light!

**REVERSE PHASE DIMMER COMPATIBILITY LIST**

BRAND	MODEL NUMBER	BRAND	MODEL NUMBER
LUTRON	DVELV-300P-BR	LUTRON	DVELV-303P-WH
LUTRON	DVELV-300P-GR	LUTRON	MAELV-600-AL
LUTRON	DVELV-300P-IV	LUTRON	MAELV-600-BL
LUTRON	DVELV-300P-LA	LUTRON	MAELV-600-BR
LUTRON	DVELV-300P-WH	LUTRON	MAELV-600-GR
LUTRON	DVELV-303P-BR	LUTRON	MAELV-600-IV
LUTRON	DVELV-303P-GR	LUTRON	MAELV-600-LA
LUTRON	DVELV-303P-IV	LUTRON	MAELV-600-WH
LUTRON	DVELV-303P-LA		



**INSTALLATION GUIDE**  
Type B LED T8 3Wattage+5CCT Selectable Tube Light



 **WARNINGS:**

TO AVOID PERSONAL INJURY AND/OR POSSIBLE PRODUCT DAMAGE, THE FOLLOWING CAUTIONS MUST BE FOLLOWED.

- Read all safety information and instructions before installation.
- RISK OF ELECTRIC SHOCK. Disconnect power at fuse or circuit breaker before installing or servicing.
- Suitable for damp locations - Not for use where directly exposed to water.
- Caution: Only use the control provided with or specified by these instructions to control this lamp. This lamp will not operate properly when connected to a standard (incandescent) dimmer or dimming control..
- This device is not intended for use with emergency exits.
- To prevent early lamp failure, lamp should only be installed in operating environments ranging between: -20°C and +45°C (-4°F and +113°F).
- WARNING – RISK OF FIRE OR ELECTRIC SHOCK. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- WARNING – RISK OF FIRE OR ELECTRIC SHOCK. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Installers should not disconnect existing wires from lamp socket terminals to make new connections at lamp socket terminals. Instead, installer should cut existing lamp socket leads away from the lamp socket and make new electrical connections to lamp socket lead wires by employing connectors suitable for the application.
- THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.
- Examine all parts that are not intended to be replaced by the retrofit kit for damage and replace any damaged parts prior to installation of the retrofit kit.
- The tube is installed as Type B, the luminaire, once modified as retrofit fixture, will no longer operate fluorescent lamps.
- For a linear tubular LED lamp conversion, there shall be text or a diagram showing how the supply connections were made to the lamp holders so the correct connections will be made to the lamp when the lamp is installed or replaced.

## WIRING DIAGRAM:

Connect two wires to branch circuit L and N according to the below figure.


Case 1: Direct AC wiring diagram without dimming

1. Single-ended power input




Input voltage: 120-277V 50/60Hz

2. Double-ended power input



Input voltage: 120-277V 50/60Hz

Case 2: Direct AC wiring diagram with 0-10V dimming system

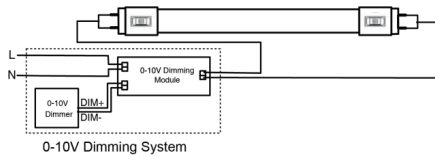

Input Voltage: AC120-277V 50/60Hz

Case 3: Direct AC wiring diagram with reverse phase dimming



Input Voltage: AC 120-277V 50/60Hz

Important Notes:


- For single-ended wiring installation of tubes, un-shunted lamp holders must be used.
- For double-ended wiring installation, it is not needed to change the sockets/lamp holders (if they are in good condition) regardless of the type of sockets.

## INSTALLATION GUIDE:

Please completely comply with these instructions and notes to ensure that the product is operated in a safe condition. Important safety information - read all instructions before installation.

## Instructions


### 1. DISCONNECT POWER OF LUMINAIRE

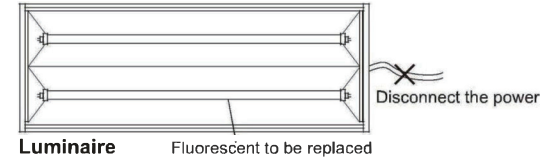

Disconnect power to luminaire or circuit (if possible). Ensure all power is off by using a voltmeter or other method to confirm.

### 2. REMOVE EXISTING TUBE LAMP(S)

- Remove troffer lens, if present.
- Remove existing fluorescent by rotating one quarter turn and sliding lamp(s)
- Remove ballast cover. (Cover may be secured with screws or tabs)

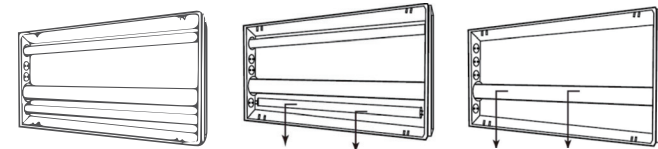

a) Troffer and lamps

b) Remove tube lamps


c) Remove ballast cover (lens removed)

### 3. RETROFIT LUMINAIRE

Modify the circuit according to the wiring diagram.

### 4. SELECT THE CCT & Wattage

- Select the color temperature through the CCT switch and the wattage through another switch on the LED lamp's bases.
- To prevent damage to lamp, lamp must not be energized when color (CCT) selector switch or wattage switch is changed.



Wattage Switch 12W/15W/18W

CCT Switch 3000K/3500K/4000K/5000K/6500K