

Installation Instruction

T8 4FT TYPE B Tube Lamp



SAFETY WARNING

- a. Risk of Fire or Electric Shock. LED Retrofit Kit Installation requires knowledge of Luminaires Electrical Systems. If not Qualified, DO NOT attempt Installation. Contact a Qualified Electrician.
- b. Risk of Fire or Electric Shock. Install this Kit only in the Luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the Input Rating of the Retrofit Kit does not exceed the Input Rating of the Luminaire.
- c. To prevent Wiring Damage or Abrasion, DO NOT Expose Wiring to edges of Sheet Metal or other Sharp Objects.
- d. Installers should not Disconnect existing Wires from Lampholder Terminals to make new Connections at Lampholder Terminals. Instead Installers should Cut existing Lampholder Leads away from the Lampholder and make new Electrical Connections to Lampholder Lead Wires by employing applicable Connectors.
- e. For a Linear Tubular LED Lamp Conversion, there shall be text or a Diagram showing how the supply Connections were made to the Lampholders so the correct Connections will be made to the Lamp when the Lamp is Installed or Replaced.
- f. This Retrofit Kit is accepted as a component of a Luminaire where the suitability of the combination shall be determined by Authorities having JURISDICTION.
- g. Dimmable with 0-10V Dimming System* - Dimming Module + 0-10V/1-10V Dimming Switch.

Important Note: Once modified as a Retrofit Fixture, will no longer operate Fluorescent Lamps. Please place enclosed label pointing out to other replacing lamps in the future that the fixture has been altered to a direct wire fixture.




ENSURE POWER SUPPLY IS OFF WHEN HANDLING ANY ELECTRICAL EQUIPMENT.

- Read and Understand the detailed Installation Instructions before installing the LED T8 Tube Light.
- LED T8 Tube Lights are designed to work with AC Direct Power Connection Direct connect works with Single-end & Double-end Power Input. Risk of Fire or Electric Shock. Read and Understand all Installation Instructions before installing LED T8 Tube Lights. For use in Dry or Damp locations only. Do not use where directly exposed to water or weather. Non-submergible (not water tight).
- Disable all Power to the Fixture before Inspection, Installation, or Removal. Failure to do so will create a Hazardous and Dangerous Working Environment.
- Do Not Make or Alter any Open Holes in the Enclosure or Electrical Components during Installation.
- Do Not Open Lamp– No User Serviceable Parts inside.

TYPE B-(Direct to Power 120/277v connection) Introduction:


Note: The Tube can work with either Single-end Power Input or Double-end Power Input



Instructions: Type B Installation Guide:


1. DISCONNECT POWER TO LUMINAIRE

Disconnect Power to Luminaire or Circuit (if possible). Ensure all Power is OFF by using a Voltmeter or other approved method to confirm.




2. REMOVE EXISTING TUBE LAMP(S)

- Remove Troffer Lens, if present.
- Remove existing Fluorescent Tube by Rotating One-quarter turn and sliding Lamp(s)
- Remove Ballast Cover. (Cover may be secured with Screws or Tabs).

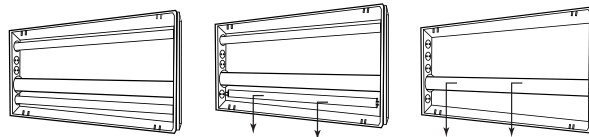

3 a. RETROFIT LUMINAIRE - Retrofit Luminaire with Inductive Ballast

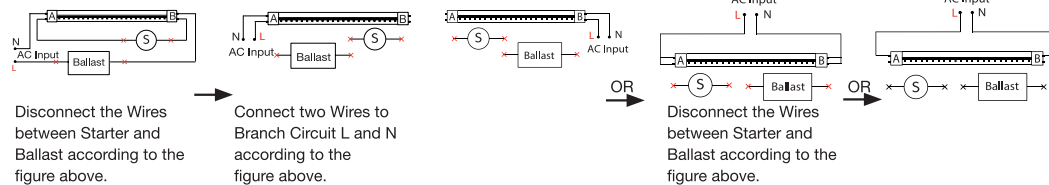


Disconnect the Wires between Starter and Ballast according to the figure above.

Connect two Wires to Branch Circuit L and N according to the figure above.

Disconnect the Wires between Starter and Ballast according to the figure above.


3 b. RETROFIT LUMINAIRE - Retrofit Luminaire with Electronic Ballast

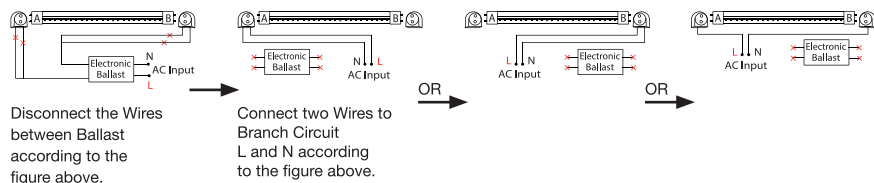

Disconnect the Wires between Ballast according to the figure above.

Connect two Wires to Branch Circuit L and N according to the figure above.


3 c. RETROFIT LUMINAIRE -Retrofit Luminaire with Two Lamps and One Electronic Ballast

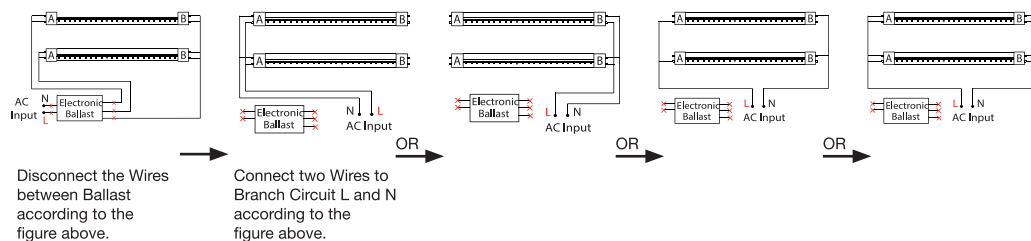

Disconnect the Wires between Ballast according to the figure above.

Connect two Wires to Branch Circuit L and N according to the figure above.


3 d. RETROFIT LUMINAIRE -Retrofit Luminaire with Three Lamps and One Electronic Ballast

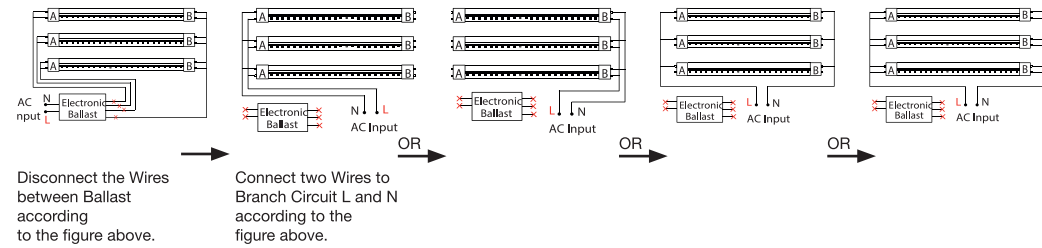

Disconnect the Wires between Ballast according to the figure above.

Connect two Wires to Branch Circuit L and N according to the figure above.

3 e. RETROFIT LUMINAIRE -Retrofit Luminaire with Four Lamps and One Electronic Ballast

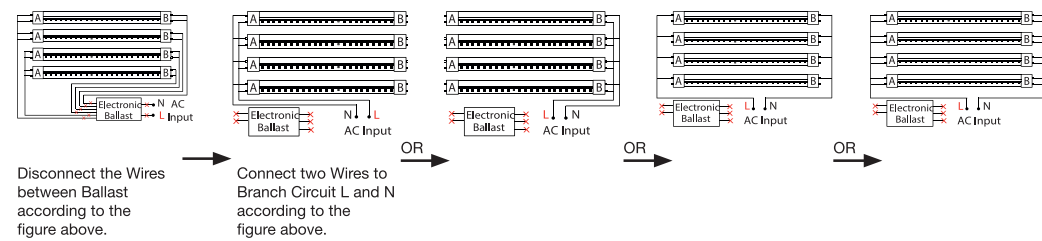

Disconnect the Wires between Ballast according to the figure above.

Connect two Wires to Branch Circuit L and N according to the figure above.

4. INSERT LED TUBES

- Ensure both the ends of the LED Tube are aligned with Socket, then insert LED Lamp in the normal way by sliding Pins into Sockets and rotating a quarter turn until the LED Tube locks in place.
- LED Lamps are now fully installed.
- Replace Troffer Lens, if present.
- After modification completed. Attach the Replacement Marking and Cautionary Label to a visible place on the Luminaire and keep it visible after installation.

5. RESTORE THE POWER OF LUMINAIRE

Restore Power to Circuit/Luminaire and test Light. If necessary, adjust position of LED Tube, and enjoy your new LED Tube!

Safety Cautions

- Do not remove the ground contact.
- Do not cover the luminaire, hang or fasten anything from it.
- Do not use fixture or lamp if there is any damage can be seen to the product.
- Do not use a fixture where water has entered the housing.
- Do not operate if any smoke, steam or crackling noises can be seen or heard from the luminaire.
- Avoid installation in any areas where there is a risk of heavy mechanical loads.
- Do not place any material over the lens or LED diode/chip.
- Do not clean using any solvent based abrasive or aggressive product.
- Light engines/LED'S and other light sources may heat up, please take care when handling the products.
- LED's are sensitive to electrostatic discharge. Do not touch the surface of the LED module.
- Do not connect to a temporary electricity supply, this may damage the electronics.
- Keep away from children.