



LED FLOOD FIXTURE

Tunable Wattage & CCT




PRODUCT FEATURES

- **Tunable Power**
- **Tunable CCT - 3000K / 4000K / 5000K**
- Die-Cast Aluminum Alloy Housing
- Bronze Finish
- 120-277 Voltage Rating, PF > 0.9
- CRI > 80
- 140 Lm/W
- Motion Sensor & Photocell Included
- Clear Plastic Lens
- IP65 Rating - Suitable for Wet Locations
- 0-10V Dimming
- UL Certified
- DLC Premium Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -40°F to 113°F (-40°C to 45°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	INPUT VOLTAGE (V)	DIMENSIONS (IN) (L x W x H)
CLF12-150W-H3-TCP(MSP)	L150WTUNFLCL12	70W/100W/150W	9,800-21,000	120-277	16.9 X 9.8 X 2.6
CLF12-150W-H3-HV-TCP(MSP)	L150WHTUNFLCL12	70W/100W/150W	9,800-21,000	277-480	16.9 X 9.8 X 2.6
CLF12-300W-H3-TCP(MSP)	L300WTUNFLCL12	200W/240W/300W	28,000-42,000	120-277	22.7 X 13.3 X 2.8
CLF12-300W-H3-HV-TCP(MSP)	L300WHTUNFLCL12	200W/240W/300W	28,000-42,000	277-480	22.7 X 13.3 X 2.8

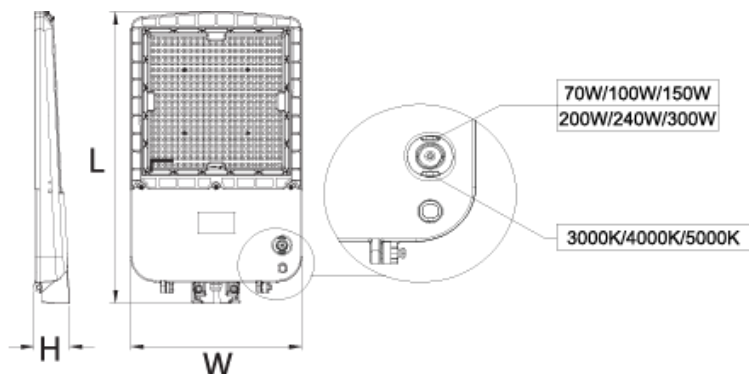




LED FLOOD FIXTURE

CLF12 Accessory Arm Mounts



SLIP FITTER



TRUNNION



UNIVERSAL



STRAIGHT ARM



YOKE

PRODUCT FEATURES

- Die-Cast Aluminum Alloy
- Outdoor Powder Coating
- Bronze Finish
- 5-Year Limited Warranty

PRODUCT SPECIFICATIONS

MODEL	ITEM #	LENGTH (in)	WIDTH (in)	HEIGHT (in)	NOTES
CLF12-SL-BZ	LMOUNTSLIPCL12	9.10	3.59	3.07	Fits tenon up to 2.375 in diameter. Adjustable from 0°-180°
CLF12-SA-BZ	LMOUNTSTRACL12	6.59	3.62	6.38	For square poles.
CLF12-TR-BZ	LMOUNTTRUNCL12	7.36	6.30	2.44	Adjustable from 0°-180°
CLF12-UNIV-BZ	LMOUNTUNIVCL12	9.34	3.62	6.38	For square or round poles Adjustable from 0°-180°
CLF12-YK150-BZ	LMOUNTYK150CL12	8.19	10.12	1.97	Fits CLF12 150W Flood Fixture only Adjustable from 0°-180°
CLF12-YK300-BZ	LMOUNTYK300CL12	11.54	13.58	1.97	Fits CLF12 150W Flood Fixture only Adjustable from 0°-180°

