




LED FLOOD FIXTURE

Tunable Wattage & CCT

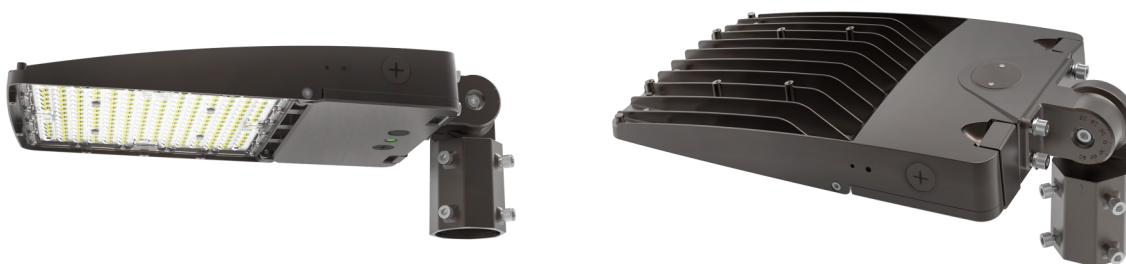

PRODUCT FEATURES


- TUNABLE POWER & CCT**
- ADC12 Aluminum Heat Sink Housing
- Rotatable Lens for More Applications
- High Performance Optics
- Outdoor Powder Coating
- Bronze Finish
- Photocell Included
- Available with Slip-Fitter, Straight Arm or Trunnion Mount Pre-Attached
- Dimming: 0-10V/PWM/VR
- IP65 Rating - Suitable for Wet Locations
- 120 - 277 Voltage Rating
- 50,000 Hour Lifetime Rating
- DLC Premium Listed
- UL Certified
- 5-Year Limited Warranty
- Operating Temperature: -40°F to 122°F (-40°C to 50°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (lm/W)
CLF14-150S-UNV-8SC1-T3-XX-BZ-BPC	L150WTUNXXCL14	80 (L)	12,000	3000	15.55 x 9.88 x 2.60	150
		100 (M)	15,000	4000		
		150 (H)	22,500	5000		
CLF14-300S-UNV-8SC1-T3-XX-BZ-BPC	L300WTUNXXCL14	200 (L)	30,000	3000	18.75 x 12.67 x 2.76	150
		240 (M)	36,000	4000		
		300 (H)	45,000	5000		

Where "XX" Can be: SF - Slip-Fitter Mount
QD - Straight Arm Mount
TR - Trunnion Mount

DIMENSIONS

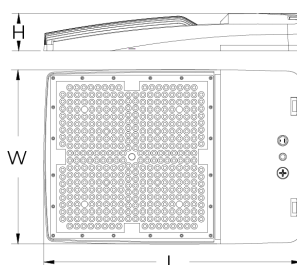

POWER & COLOR ADJUSTABLE CONTROLS

