




# LED EMERGENCY GLASS TUBE

UL 924-Certified

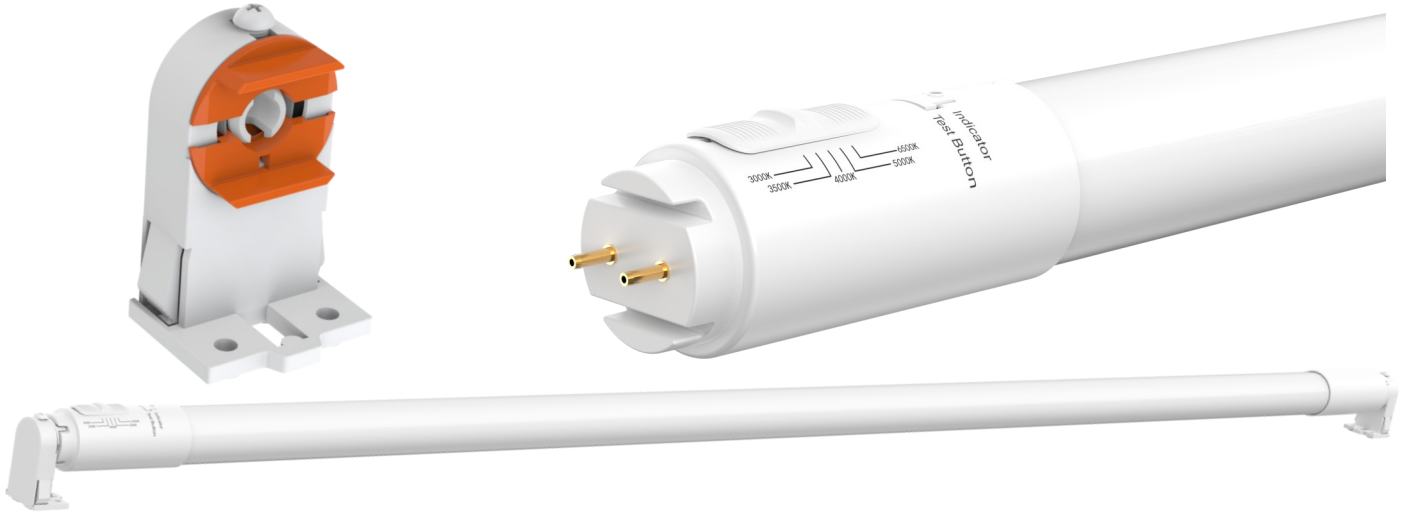

## PRODUCT FEATURES

- **TUNABLE COLOR - 3000K•3500K•4000K•5000K•6500K**
- Retrofit / Bypass Mode (Type B)
- Existing Fixture is Wired to Bypass the Ballast
- Emergency Sockets Included
- Film Coated Shatter Resistant Glass Tube
- Frosted
- Non-Dimmable
- 120-277 Voltage Rating, PF > 0.9
- CRI > 80
- 152 Lm/W High Efficiency
- Medium Bi-Pin / G13 Mounting
- NSF Certified
- UL924, UL1993 & UL1598C Certified
- 9.6V 600mAh Lithium Battery
- 50,000 Hour Lifetime Rating  
1,000 Cycles Battery Lifetime
- 5-Year Limited Warranty Regular Lighting  
3-Year Limited Warranty Emergency Lighting
- Operating Temperature Range:  
32°F to 113°F (0°C to 45°C)

## PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER	EMERGENCY POWER OUTPUT	NORMAL LUMEN	EMERGENCY LUMEN	TIME WORKING UNDER EMERGENCY
CLT97-12.5W(EM)2G-5CCT	L12.5EMTUNBCL97	12.5 W	2.5 W	1900Lm	400Lm	90 MINUTES

