




PRODUCT FEATURES

- Magnesium Alloy Housing
- Black Finish
- IP51 Rating
- 100-277 Voltage Rating, PF > 0.9
- CRI > 70
- 270° Rotatable Mogul Base (E39)
- Type III Light Distribution
- Clear Plastic Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL / cUL Certified
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)
CLC11-115W-H1-E-50K	L115W5KHCL11	115	13,600	5000	11.69 x 5.43 x 3.43	118

PHOTOMETRY

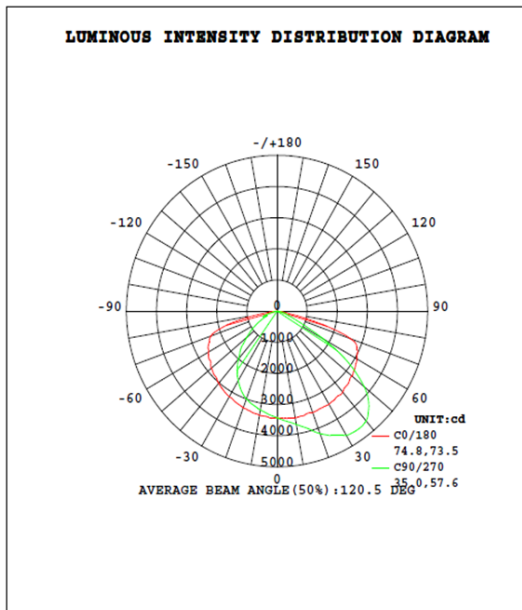

Flux out:6576 lm

1m	1952,35451x	204.89cm
2m	488.0,886.21x	409.78cm
3m	216.9,393.91x	614.67cm
4m	122.0,221.61x	819.56cm
5m	78.08,141.81x	1024.46cm
6m	54.22,98.471x	1229.35cm
7m	39.84,72.351x	1434.24cm
8m	30.50,55.391x	1639.13cm
9m	24.10,43.771x	1844.02cm
10m	19.52,35.451x	2048.91cm

Height Avg,Emax Angle:91.38deg Diameter
 Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

DIAGRAM

