




PRODUCT FEATURES

- Magnesium Alloy Housing
- Black Finish
- IP51 Rating
- 100-277 Voltage Rating, PF > 0.9
- CRI > 70
- 270° Rotatable Mogul Base (E39)
- Type III Light Distribution
- Clear Plastic Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL / cUL Certified
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)
CLC11-54W-H2-E-50K	L54W5KHCL11	54	5,900	5000	11.69 x 5.43 x 3.43	123

PHOTOMETRY

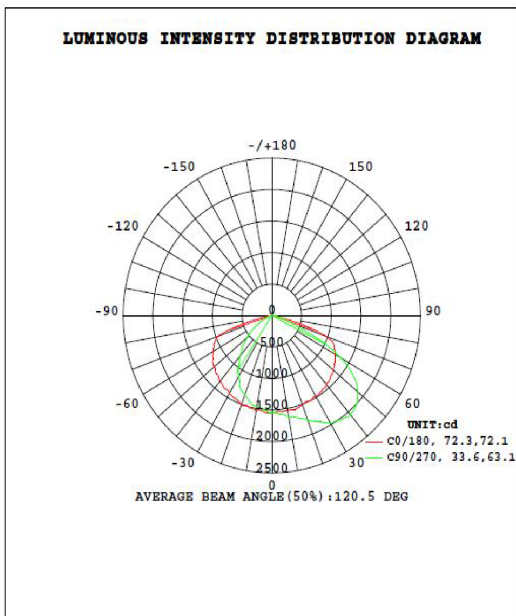

Height	Eavg, Emax	Angle: 96.65deg	Diameter
3.281ft 1m	71.05, 145.3fc 764.8, 1563lx		7.371ft 224.65cm
6.562ft 2m	17.76, 36.31fc 191.2, 390.9lx		14.74ft 449.31cm
9.843ft 3m	7.895, 16.14fc 84.98, 173.7lx		22.11ft 673.96cm
13.12ft 4m	4.441, 9.078fc 47.80, 97.72lx		29.48ft 898.61cm
16.4ft 5m	2.842, 5.810fc 30.59, 62.54lx		36.85ft 1123.27cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

DIAGRAM

