



PRODUCT FEATURES



- Die-Cast Aluminum Alloy Housing
- Bronze Finish
- IP65 Rating - Suitable for Wet Locations
- 100-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Dimmable
- Striped Clear Plastic Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL / cUL Certified
- Operating Temperature: -22°F to 122°F (-30°C to 50°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
CLCN11-40W-RAA-BR50	L40W5KCNRCL11	40	5,000	5000	Ø 10.04 x 3.11	125	150°

PHOTOMETRY

Luminous Intensity Distribution Curve

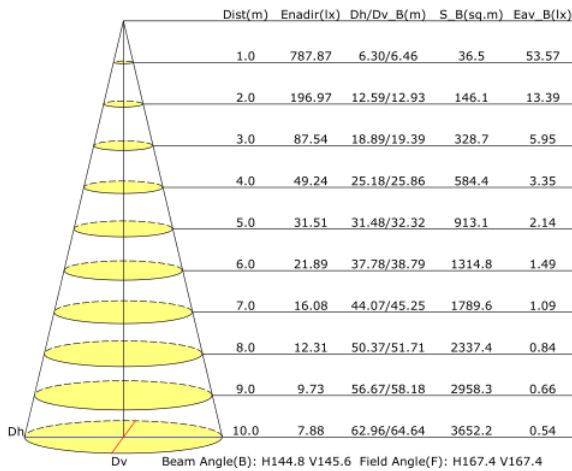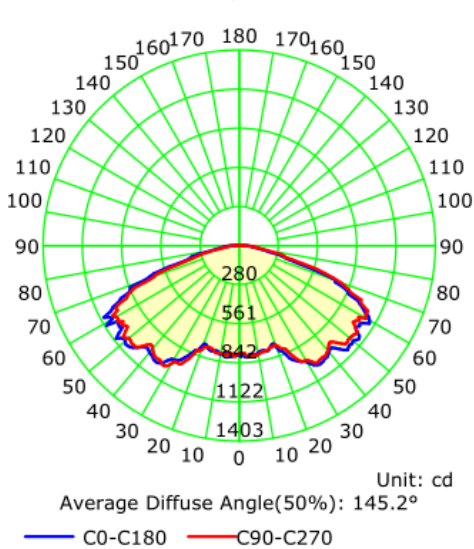

DIAGRAM

