




LED FLOOD FIXTURE



Mounts Sold
Separately

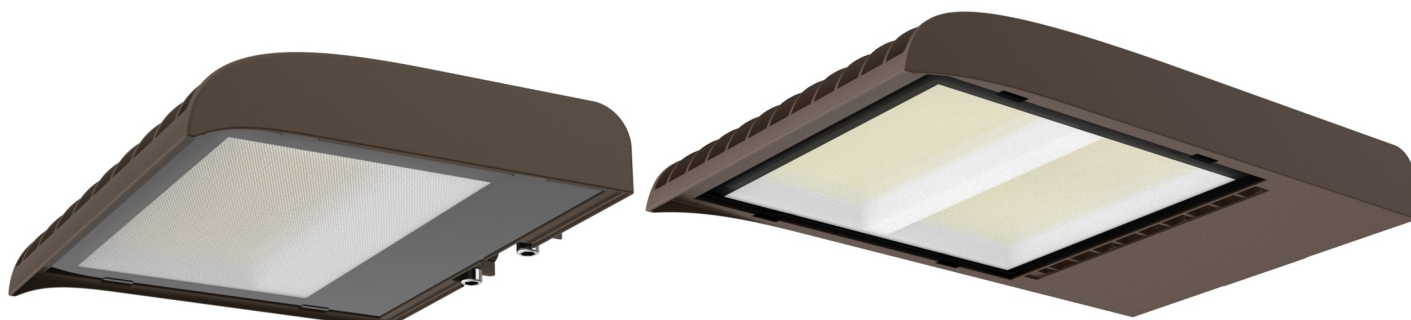

STRAIGHT ARM



SLIP FITTER



TRUNNION



YOKE

PRODUCT FEATURES

- TUNABLE POWER**
- ADC12 Aluminum Heat Sink Housing
- Outdoor Powder Coating
- Bronze Finish
- IP65 Rating - Suitable for Wet Locations
- Dimming: 0-10V/PWM/VR
- 50,000 Hour Lifetime Rating
- DLC Premium Listed
- UL Certified
- High Light Transmittance PC, Anti-UV and Fire Resistance Lens
- Highly Conductive, Waterproof, Aging Resistance, Salt Mist Resistance Aluminum LED Board
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)
- 5-Year Limited Warranty
- Mounts sold separately for 150W - 300W Flood Fixtures
 - Slip-Fitter - CLF4-SLIP FIT-Q (9.88 x 3.5 x 3.0)
 - Straight Arm - CLF4-STRAIGHT ARM-Q (7.13 x 6.13 x 3.5)
 - Trunnion - CLF4-TRUNNION-Q (5.75 x 6.0 x 2.0)
 - Yoke - CLF4-YOKE-Q-80W-230W (13.38 x 10.13 x 1.75)

PRODUCT SPECIFICATIONS

MODEL	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN)	EFFICIENCY (lm/W)	BEAM ANGLE / OPTIC TYPE	VOLTAGE (V)
CLF4-150VP5YYBR-TN	50	6,750	5000	12.6 x 11.5 x 2.75	135	TYPE III	120 - 277
	80	10,800					
	100	13,500					
	150	20,250					
CLF4-300VP5YYBR-TN	150	20,250	5000	12.75 x 20.0 x 3.0	135	TYPE III	120 - 277
	200	27,000					
	240	32,400					
	300	40,500					

