


PRODUCT FEATURES

- ADC12 Aluminum Heat Sink Housing
- Outdoor Powder Coating
- Bronze Finish
- Dimming: 0-10V/PWM/VR
- CCT - 5000K
- High Efficiency - 145 Lm/W
- UL Certified
- High Light Transmittance PC, Anti-UV and Fire Resistance Lens
- Highly Conductive, Waterproof, Aging Resistance, Salt Mist Resistance Aluminum LED Board
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)
- IP65 Rating - Suitable for Wet Locations
- Includes Straight Arm or Slip Fitter Mount
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty

PRODUCT SPECIFICATIONS

MODEL	POWER (W)	LUMENS (LM)	VOLTAGE	DIMENSIONS (IN)	MOUNT	OPTICS / BEAM ANGLE
CLF4-600P5MABR-T3I	600	87,000	100 - 277	16.65 x 25.47 x 4.53	Straight Arm	TYPE III
CLF4-600P5SFBR-T3I	600	87,000	100 - 277	16.65 x 25.47 x 4.53	Slip Fitter	TYPE III
CLF4-600PH5MABR-T3M	600	87,000	277 - 480	16.65 x 25.47 x 4.53	Straight Arm	TYPE III
CLF4-600PH5SFBR-T3M	600	87,000	277 - 480	16.65 x 25.47 x 4.53	Slip Fitter	TYPE III

PHOTOMETRY

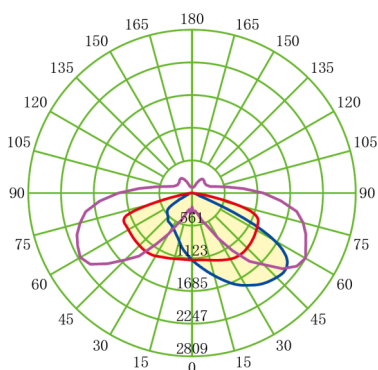

LINE DRAWING

