




# LED BACKLIT PANEL

Tunable Wattage & CCT  
Emergency Battery Backup

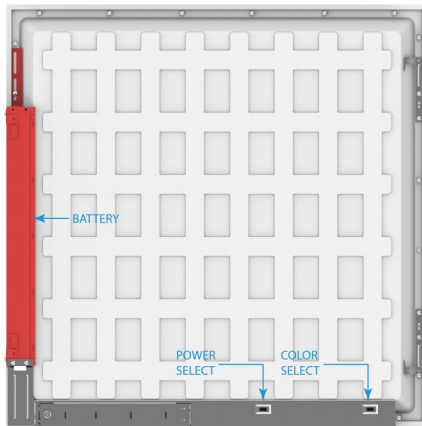

## PRODUCT FEATURES

- **TUNABLE POWER**
- **TUNABLE CCT (3500K / 4000K / 5000K)**
- White Finish Frame
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- 0-10V Dimming
- 120-277 Voltage Rating, PF > 0.9
- CRI > 80
- Sensor Ready (JD Item# LSENSORPIROCC)
- 110 Lm/W High Efficiency
- Damp Rated
- Flicker-free Lighting
- UL Listed
- DLC Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- 24 Hour Battery Recharge Time
- Operational Temperature Range 32°F to 104°F (0°C to 40°C)

## PRODUCT SPECIFICATIONS

MODEL	ITEM #	NORMAL POWER	NORMAL LUMENS	BATTERY POWER	BATTERY LUMENS	BATTERY DURATION	DIMENSIONS (in)
CLP15-2X2-40W0R11G80-3CCTW GEN-01	L2X2BTUNSECLP15	20 W	2200				23.74 x 23.74 x 1.65
		30 W	3300	8 W	1000	90 MINUTES	
		40 W	4400				
CLP15-2X4-50W1R11G80-3CCTW GEN-01	L2X4BTUNSECLP15	30 W	3300				23.74 x 47.76 x 1.65
		40 W	4400	8 W	1000	90 MINUTES	
		50 W	5500				

