




# LED BACKLIT PANEL

## Tunable Wattage & CCT

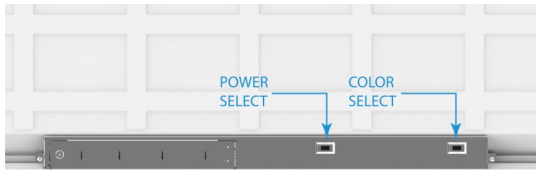

### PRODUCT FEATURES

- **TUNABLE POWER & CCT**
- White Finish Frame
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- 0-10V Dimming
- 120-277 Voltage Rating, PF > 0.9
- CRI > 80
- Sensor Ready (JD Item# LSENSORPIROCC)
- High Luminous Efficiency
- Damp Rated
- Flicker-free Lighting
- UL Listed
- DLC Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range -4°F to 104°F (-20°C to 40°C)

### PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (in)	EFFICIENCY (lm/W)
CLP15-2X2-40W0R11R80-3CCTW GEN-01	L2X2BTUNSCLP15	20	2200	3500	23.74 x 23.74 x 1.46	110
		30	3300	4000		
		40	4400	5000		
CLP15-2X4-50W1R11R80-3CCTW GEN-01	L2X4BTUNSCLP15	30	3300	3500	23.74 x 47.76 x 1.46	110
		40	4400	4000		
		50	5500	5000		

