




LED BACKLIT PANEL

Tunable Wattage & CCT

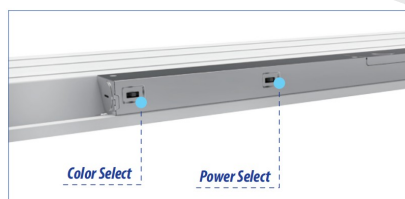

PRODUCT FEATURES

- **TUNABLE POWER & CCT**
- White Finish Frame
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- 0-10V Dimming
- CRI > 80, PF > 0.9
- 120 - 277 Voltage Rating
- IP20 Rated
- Flicker-Free Lighting
- High Luminous Efficiency
- DLC Listed
- UL Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range
-13°F to 104°F (-25°C to 40°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (in)	EFFICIENCY (lm/W)
CLP93-2X2-40W-U8-3550	L2X2BTUNCLP93	20	2200	3500	23.74 x 23.74 x 1.53	110
		30	3300	4000		
		40	4400	5000		
CLP93-2X4-50W-U8-3550	L2X4BTUNCLP93	30	3300	3500	23.74 x 47.76 x 1.53	110
		40	4400	4000		
		50	5500	5000		

