



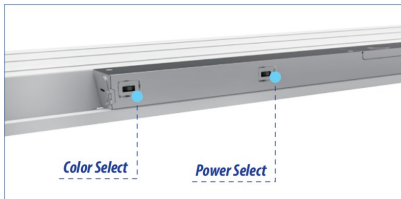

LED BACKLIT PANEL

Tunable Wattage & CCT

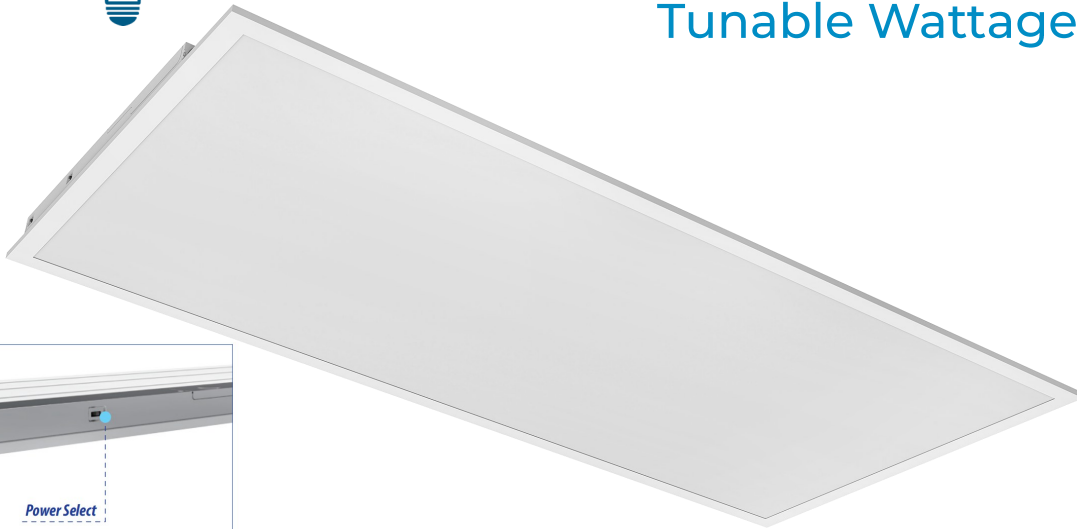

PRODUCT FEATURES

- **TUNABLE POWER & CCT**
- White Finish Frame
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- 0-10V Dimming
- CRI > 80, PF > 0.9
- 120 - 277 Voltage Rating
- IP20 Rated
- Flicker-Free Lighting
- Sensor Receptacle for External Sensor (sensor sold separately)
 - Sharkward ANT-15P PIR Occupancy Sensor
 - JD Item# (LSENSORPIROCCQ)
- High Luminous Efficiency
- DLC Listed
- UL Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range -13°F to 104°F (-25°C to 40°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (in)	EFFICIENCY (lm/W)
CLP93-1X4-40W-U8-3550-MS-IR	L1X4BTUNSCLP93	20	2200	3500	11.93 x 47.76 x 1.53	110
		30	3300	4000		
		40	4400	5000		
CLP93-2X2-40W-U8-3550-MS-IR	L2X2BTUNSCLP93	20	2200	3500	23.74 x 23.74 x 1.53	110
		30	3300	4000		
		40	4400	5000		
CLP93-2X4-50W-U8-3550-MS-IR	L2X4BTUNSCLP93	30	3300	3500	23.74 x 47.76 x 1.53	110
		40	4400	4000		
		50	5500	5000		

