




LED T5 BYPASS MODE TUBES

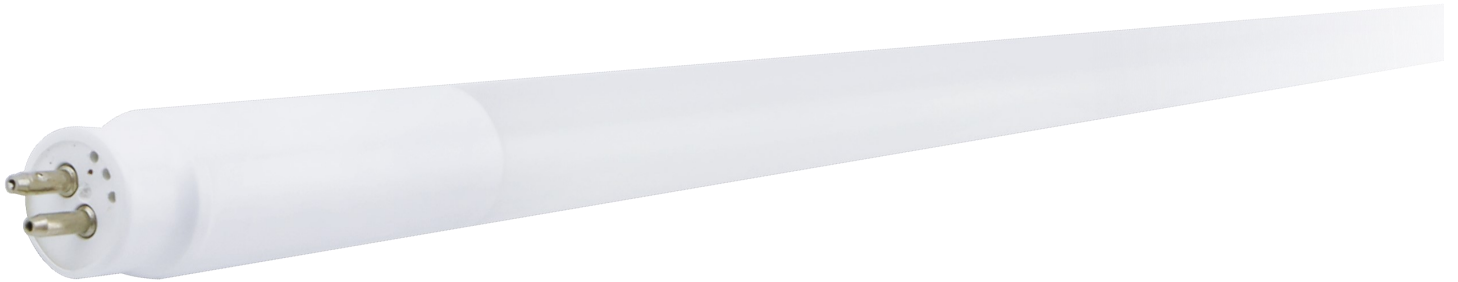

PRODUCT FEATURES

- Bypass Mode - Double Ended (Type B)
- Bypass installation utilizes existing lamp holders
- Film Coated Shatter Resistant Glass Tube
- Frosted
- Instant On / No Flicker
- Non-Dimming
- 120-277 Voltage Rating, PF > 0.9
- DLC Listed
- UL Certified
- G5 Mounting
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -4°F to 104°F (-20°C to 40°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	LENGTH (IN)	EFFICIENCY (Lm/W)	BEAM ANGLE
CLT95-25WT51-40-B-Y	L25T54KBCL95	25	3200	4000	48.0	128	180°
CLT95-25WT51-50-B-Y	L25T55KBCL95	25	3200	5000	48.0	128	180°

