



# LED UFO HIGH BAY FIXTURE




## PRODUCT FEATURES

- **TUNABLE POWER - 100W / 120W / 150W**
- Die-Cast Aluminum Alloy Housing
- Black Finish
- Clear PC Lens
- 277-480 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 0-10V, PWM, VR
- Sensor Ready
- 1/2" Female Thread for Stem Mount
- IP65 Rating - Suitable for Wet Locations
- 6kV Surge Protection
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL Certified
- DLC Premium Listed
- Operating Temperature: -40°F to 122°F (-40°C to 50°C)

## PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
		150	21,750				
CLU11-150WS1BT2H1-BH50WS	L150W5KUFOHCL11	120	18,360	5000	Ø 10.8 x 6.61	153	90°
		100	15,300				

### PHOTOMETRY

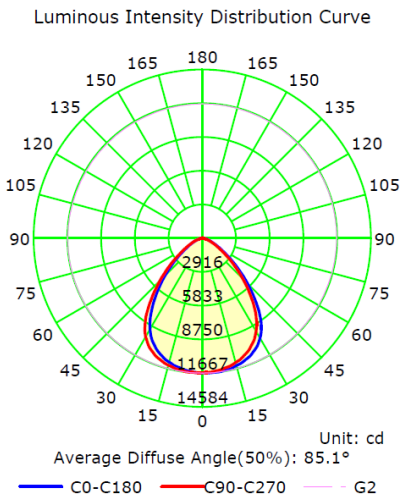

### The Average Illuminance Effective Figure

Height	Avg./Nadir, E	Beam Angle:84.9°	Diameter / Area
1.0m	309.74/ 11623.41lx		1.83m / 2.63sq.m
2.0m	152.43/ 2905.85lx		3.66m / 10.53sq.m
3.0m	101.62/ 1291.49lx		5.49m / 23.69sq.m
4.0m	76.31/ 726.46lx		7.32m / 42.11sq.m
5.0m	61.39/ 464.94lx		9.15m / 65.80sq.m
6.0m	51.38/ 322.87lx		10.98m / 94.76sq.m
7.0m	44.57/ 237.21lx		12.81m / 128.97sq.m
8.0m	39.78/ 181.62lx		14.65m / 168.45sq.m
9.0m	35.73/ 143.50lx		16.48m / 213.20sq.m
10.0m	32.10/ 116.23lx		18.31m / 263.21sq.m

Flux Out: 15291.87lm

### DIAGRAM

