



# LED UFO HIGH BAY FIXTURE




## PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Black Finish
- IP65 Rating - Suitable for Wet Locations
- 200-480 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 1-10V, PWM, VR
- Flat Clear Glass Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- DLC Premium Listed
- UL / cUL Certified
- Operating Temperature: -22°F to 122°F (-30°C to 50°C)


## PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
CLU11-240WSH1-BK50	L240W5KUFOHCL11	240	32,400	5000	Ø 14.17 x 8.98	135	110°

### DIAGRAM

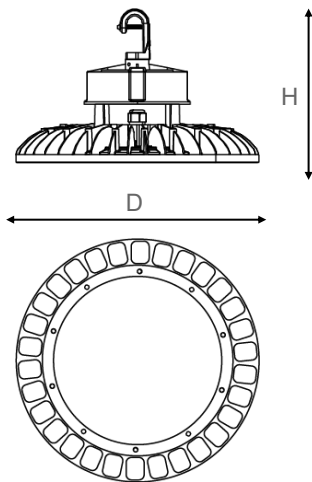

### PHOTOMETRY

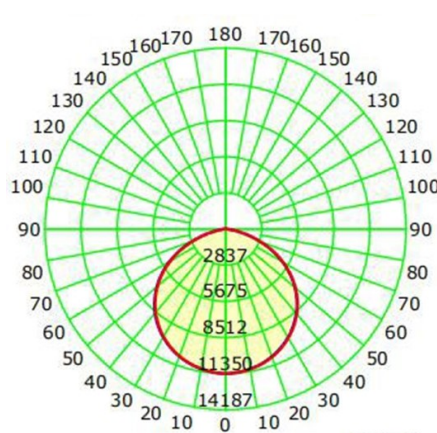

Flux Out: 24906.24lm

Height	Avg./Nadir, E	Beam Angle: 114.7°	Diameter / Area
1.0m	3258.39/ 11343.68lx		3.12m / 7.64sq.m
2.0m	814.60/ 2835.92lx		6.24m / 30.57sq.m
3.0m	362.04/ 1260.41lx		9.36m / 68.79sq.m
4.0m	203.65/ 708.98lx		12.48m / 122.30sq.m
5.0m	130.34/ 453.75lx		15.60m / 191.09sq.m
6.0m	90.51/ 315.10lx		18.72m / 275.17sq.m
7.0m	66.50/ 231.50lx		21.84m / 374.54sq.m
8.0m	50.91/ 177.24lx		24.96m / 489.20sq.m
9.0m	40.23/ 140.05lx		28.08m / 619.14sq.m
10.0m	32.58/ 113.44lx		31.20m / 764.37sq.m

