



# LED UFO HIGH BAY FIXTURE




## PRODUCT FEATURES

- **TUNABLE POWER - 180W / 200W / 240W**
- Die-Cast Aluminum Alloy Housing
- Black Finish
- Clear PC Lens
- 277-480 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 0-10V, PWM, VR
- Sensor Ready
- 1/2" Female Thread for Stem Mount
- IP65 Rating - Suitable for Wet Locations
- 6kV Surge Protection
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL Certified
- DLC Premium Listed
- Operating Temperature: -40°F to 122°F (-40°C to 50°C)

## PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
		240	36,720				
CLU11-240WS1BT2H1-BH50WS	L240W5KUFOCLH11	200	30,600	5000	Ø 12.6 x 6.61	153	90°
		180	27,540				

### PHOTOMETRY

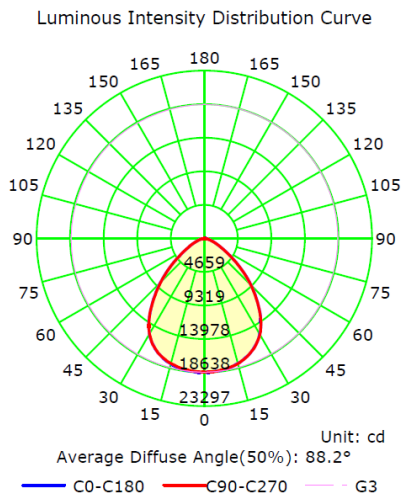

### The Average Illuminance Effective Figure

Height	Avg./Nadir, E	Beam Angle: 88.3°	Diameter / Area
1.0m	765.39 / 18570.78lx		1.94m / 2.96sq.m
2.0m	382.69 / 4642.69lx		3.88m / 11.85sq.m
3.0m	255.13 / 2063.42lx		5.83m / 26.67sq.m
4.0m	191.35 / 1160.67lx		7.77m / 47.41sq.m
5.0m	150.62 / 742.83lx		9.71m / 74.08sq.m
6.0m	124.48 / 515.85lx		11.65m / 106.67sq.m
7.0m	108.21 / 379.00lx		13.60m / 145.20sq.m
8.0m	96.65 / 290.17lx		15.54m / 189.64sq.m
9.0m	87.65 / 229.27lx		17.48m / 240.02sq.m
10.0m	80.65 / 185.71lx		19.42m / 296.32sq.m

Flux Out: 25973.45lm

### DIAGRAM

