




PRODUCT FEATURES

- ADC12 Aluminum Heat Sink Housing
- Outdoor Powder Coating
- Black Finish
- Steel Safety Sling
- IP65 Rating - Suitable for Wet Locations
- 100-277 Voltage Rating, PF > 0.9, THD < 20%
- Dimming: 0-10V, PWM, VR
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)
- High Light Transmittance Optical Lens
- Highly Conductive, Waterproof, Aging Resistance, Salt Mist Resistance Aluminum LED Board
- 6KV Surge Protection
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- DLC Premium Listed
- UL Listed

PRODUCT SPECIFICATIONS

MODEL	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (D x H)	EFFICIENCY (Lm/W)	BEAM ANGLE
CLU4-150P5PDBK	150	20,250	5000	Ø 10 7/8 x 7 1/8	135	90° x 90°

PHOTOMETRY

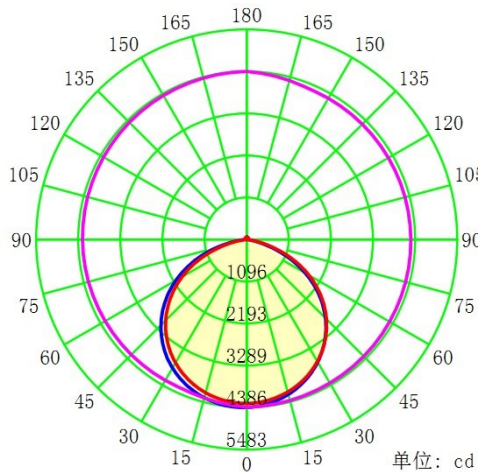

— C0-C180 — C90-C270 — G2

DIAGRAM

